
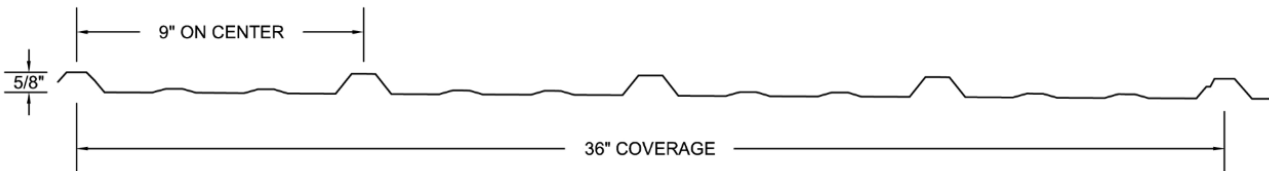


# NORSTAR PANEL

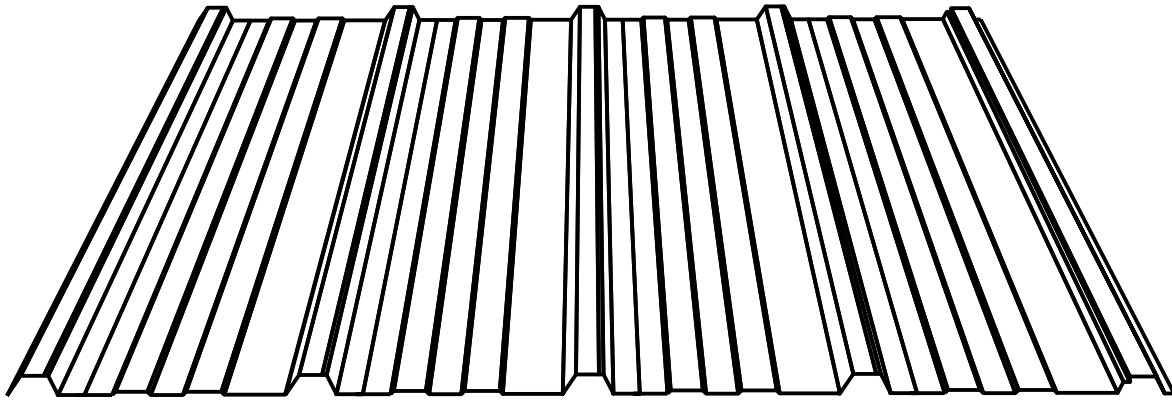

The NorStar panel covers 36 inches and is composed of five major ribs at 5/8 inches tall and 9 inches on center. The stiffener ribs between the major ribs are symmetrical with the flat areas to provide an attractive appearance. This product can be utilized as a roofing, liner and/or siding panel. It is also available as a reversed and/or soffit panel.

Available in both zincalume and pre-painted zincalume steel, the paint coating is a durable baked on Silicone Modified Polyester (SMP) finish and is available in the colors listed below. The SMP conforms to ASTM D 523-89, ASTM D 2247, ASTM B 117, ASTM D 4214, ASTM 2244, ASTM D 3363, ASTM D 2794-93, and ASTM D 4145-83 properties.

**Notes:**

1. Allowable loads are for uniform load on 3 spans simultaneously
2. Minimum slope requirement is 3/12

ALLOWABLE LIVE LOADS		INWARD LOAD				OUTWARD LOAD			
Gauge	Span	2'-0"	3'-0"	4'-0"	5'-0"	4'-0"	3'-0"	4'-0"	5'-0"
29	Simple	90	40	17	9	90	53	30	19
29	Continuous	86	57	32	16	86	57	37	24

**29 GAUGE STEEL COLORS:**

Zincalume  
Brick Red  
Tahoe Blue  
Ocean Blue  
Blue Grey Tex

White  
Light Gray  
Dark Gray  
Black  
Onyx Black Tex

Light Stone  
Denali Green  
Evergreen  
Forest Green  
Weathered Copper Tex

Copper Penny  
Weathered Copper  
Medium Brown  
Dark Brown

**26 and 24 ga Zincalume and Painted Available as Special Order**

Magic Metals, Inc. 6391 E Larson Way, Palmer, AK 99645  
Phone: (800)478-6242 or (907)746-7800 Fax: (907)746-7800  
sales@magicmetalsinc.com www.magicmetalsinc.com

