
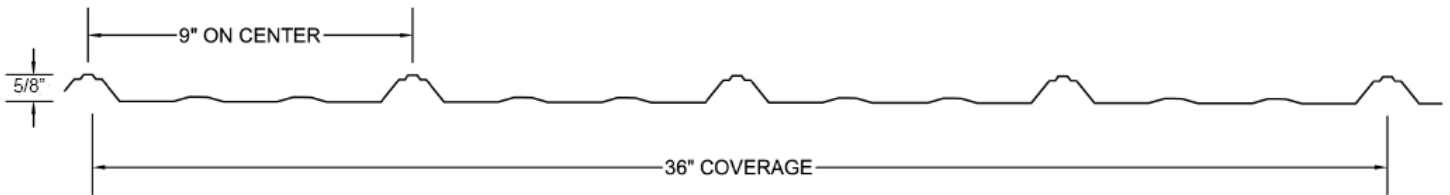


TOUGH RIB PROFILE

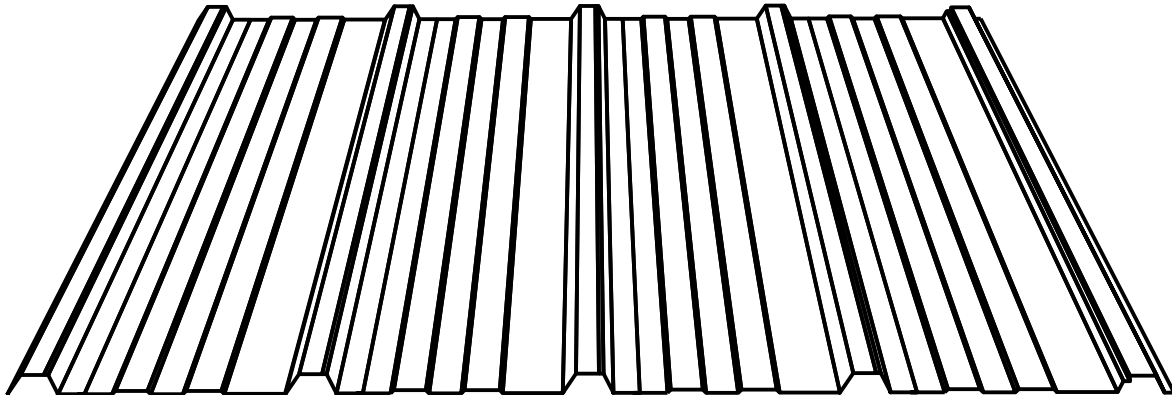

The Tough Rib panel covers 36 inches and is composed of five major ribs at 5/8 inches tall and 9 inches on center. The major ribs have a minor rib to add rigidity while the stiffener ribs between the major ribs are symmetrical in the flat areas to provide an attractive appearance. This product can be utilized as a roofing, liner and/or siding panel.

Available in both zincalume and pre-painted zincalume steel, the paint coating is a durable baked on Silicone Modified Polyester (SMP) finish and is available in the colors listed below. The SMP conforms to ASTM D 523-89, ASTM D 2247, ASTM B 117, ASTM D 4214, ASTM 2244, ASTM D 3363, ASTM D 2794-93, and ASTM D 4145-83 properties.

Notes:

1. Allowable loads are for uniform load on 3 spans simultaneously
2. Minimum slope requirement is 3/12

ALLOWABLE LIVE LOADS		INWARD LOAD				OUTWARD LOAD			
Gauge	Span	2'-0"	3'-0"	4'-0"	5'-0"	2'-0"	3'-0"	4'-0"	5'-0"
29	Simple	90	40	17	9	90	53	30	19
29	Continuous	86	57	32	16	86	57	37	24

29 GAUGE STEEL COLORS:

Zincalume
Brick Red
Tahoe Blue
Ocean Blue
Blue Grey Tex

White
Light Gray
Dark Gray
Black
Onyx Black Tex

Light Stone
Denali Green
Evergreen
Forest Green
Weathered Copper Tex

Copper Penny
Weathered Copper
Medium Brown
Dark Brown

Magic Metals, Inc. 530 E Steel Loop, Palmer, AK 99645
Phone: (800)478-6242 or (907)746-7800 Fax: (907)746-7800
magicmetals@mtaonline.net www.magicmetalsinc.com

