PRO STANDING SEAM PANEL



18" x 2" Panel with Striations



16" x 1 1/2" Panel with Pencil Ribs

16" x 2" Panel with Striations

Pro Standing Seam Panels offer the ultimate solution to shallow sloping and longer spanning roof systems. To allow for thermal movement the panels are installed with concealed clips, while the seams are mechanically fastened provide a weathertight, long lasting and dependable roof. With these and additional listed features the Pro Standing Seam Panels provide a clean and uniform appearance.

- Steel Thickness: 24 or 22 gauge
- Aluminum Thickness: .032 to .063 gauge
- Finish: PVDF/ Kynar
- Width: 12" 24"
- Seam Height: 1-1/2" or 2"
- Mechanically Fastened Seam: 90° or 180°
- Minimum Slope: 1/2:12
- Pan Style Panel available with Striations or Pencil Ribs
- · Onsite roll-forming available

- Concealed Fastener and Clip
- Open Framing and Solid Substrate Installation
- Butyl Injected Side Lap
- Butyl Injected UL Clips
- UL-90 Rated Panel
- TESTING:


ASTM E-2140


ASTM E-1592

ASTM E-1680

ASTM E-1646

- Large selection of standard, metallic and non-metallic colors
- Custom colors available

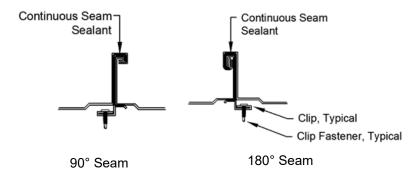



© New Tech Machinery

